



# A Robust Wearable Textile SIW RFID Antenna

G.A. Casula<sup>(1)</sup>, G. Montisci<sup>(1)</sup>, G. Muntoni<sup>(1)</sup>, H. Rogier<sup>(2)</sup>

*(1) Dipartimento di Ingegneria Elettrica ed Elettronica - Università degli Studi di Cagliari*

*(2) IDLab-EM group imec-Ghent University*



URSI GASS 2020



# INTRODUCTION

---

The main features that distinguish antennas for wearable devices from “conventional” antennas and that allow them to be efficiently integrated into a garment are:

- Mechanical robustness
- Easy manufacturing
- Low-cost
- Reduced size
- Light weight
- Flexibility
- Reliability in the proximity of the human body
- Low Specific Absorption Rate (SAR)



# INTRODUCTION

---

Passive RFID tags are particularly appropriate for modern applications, such as logistics, retail, security, sensor networks, personal healthcare and so on, due to their low cost, long life, no maintenance, and no recharging.

A typical RFID device is made of a radio-frequency antenna, connected to a suitable microchip, usually integrated with additional sensors, and is attached to the object to be tagged.

In wearable applications, the tag must operate in proximity, or even attached, to the human body, which is a very critical lossy platform.

Moreover, the tag antenna size must be kept as small as possible in order to be comfortable for the wearer, and this calls for an accurate design, especially in the UHF RFID frequency bands (from 865 to 970 MHz).



# INTRODUCTION

---

Many wearable RFID tag antennas proposed in recent literature have been designed using textile substrates, but their efficiency and gain are strongly degraded by the effects of the human body.

Wearable textile antennas based on Substrate Integrated Waveguide (SIW) cavities can improve the isolation from the human body, also allowing a low-profile planar structure, good radiation characteristics, good flexibility and multiband operation.

SIW antennas have been proposed for several applications at 2.4 GHz and beyond, using either coaxial cable or microstrip line feeding, but SIW technology has not been exploited yet for the design of a RFID passive wearable tag, especially in the lower part of UHF band (around 900 MHz), where the request of a compact size is still a hard challenge.



# INTRODUCTION

---

In this work, we propose a wearable textile RFID tag antenna based on a substrate integrated waveguide circular cavity, operating within the European UHF frequency band (865-870 MHz).

The SIW cavity works at its eight mode (EMSIW), in order to reduce the antenna size, and a further reduction is obtained by optimizing its ground plane size by exploiting the energy-based design strategy proposed in our previous works, which allow to mitigate the deterioration in antenna performance due to the body proximity.

The antenna design has been performed using CST Microwave Studio, and simulated results show a very good antenna isolation and a satisfying robustness with respect to the antenna-body coupling.



# Antenna Design


---

The proposed SIW textile wearable tag is designed at a center frequency of 868 MHz, and covers the whole frequency European band for RFID Applications (865-870 MHz).

- The dielectric substrate is composed of a closed-cell rubber foam, typically used in firefighter suits, with a thickness of 4 mm, a dielectric permittivity of 1.3, and a loss tangent  $\tan\delta = 0.03$
- The metallic traces have been implemented using a copper coated non-woven PET fabric, with a sheet resistivity of  $0.04 \Omega/\text{square}$  and a thickness of 0.11 mm.

# Antenna Design

Starting from a SIW cylindrical resonant cavity, operating in the  $TM_{010}$  mode at 868 MHz, we exploited the magnetic field symmetry of this  $TM_{010}$  mode to reduce the size of the cavity to obtain the eighth-mode SIW resonator (EMSIW).

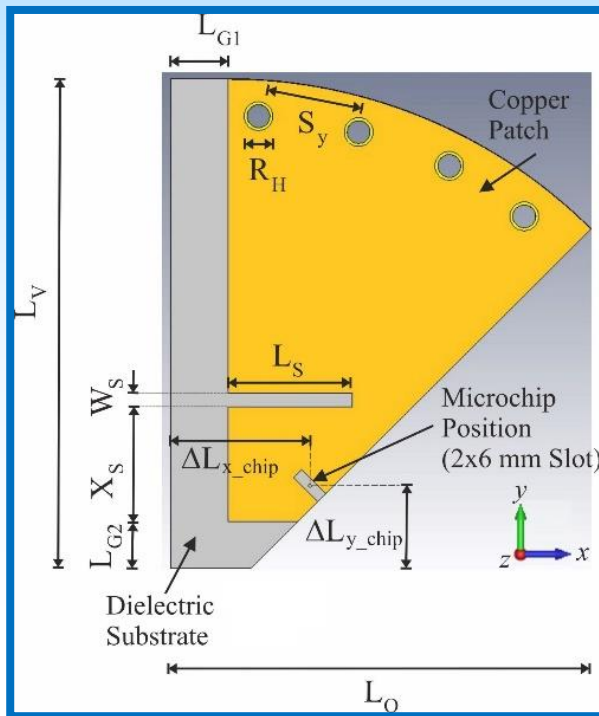

Layout of the designed SIW antenna.

$$L_O = 77.8 \text{ mm}$$

$$S_y = 16 \text{ mm}$$

$$L_V = 87.3 \text{ mm}$$

$$\Delta L_{x\_chip} = 24.3 \text{ mm}$$

$$L_S = 21.7 \text{ mm}$$

$$\Delta L_{y\_chip} = 14.4 \text{ mm}$$

$$W_S = 2.5 \text{ mm}$$

$$L_{G1} = L_{G2} = 10 \text{ mm}$$

$$X_S = 19.9 \text{ mm}$$

$$R_H = 5 \text{ mm}$$



# Antenna Design

---

In wearable antennas, the antenna electromagnetic performance is strongly influenced by the proximity of the human body, acting as a lossy, non-homogeneous material.


Therefore, a very important requirement for a wearable antenna is its robustness.

Since the distance between body and antenna randomly changes during antenna operation, the antenna specifications should be satisfied both for deployment in free space and on the human body.



# Antenna Design

A numerical phantom has been added to the simulation scenario, in order to analyze the body-antenna coupling, and to verify that the antenna performance is still acceptable in close proximity to the human body.

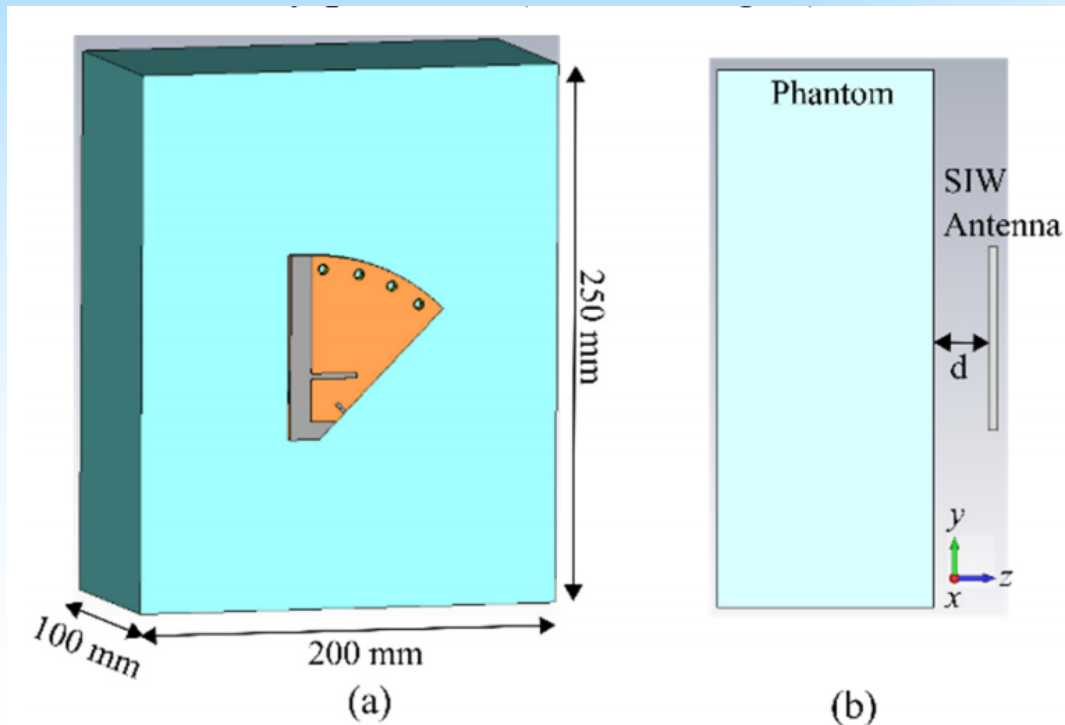


It is a simplified phantom: a single layer with muscle-like parameters at 868 MHz ( $\epsilon_r=56.6$ ,  $\sigma=1.33$  S/m), with size  $250 \times 200 \times 100$  mm<sup>3</sup>

*Designed antenna with the single layer body phantom: a) 3D view; b) side view.*

# Antenna Design

The main points of the design procedure, leading to the shown configuration, are:

## i) The choice of the ground plane and dielectric substrate extensions

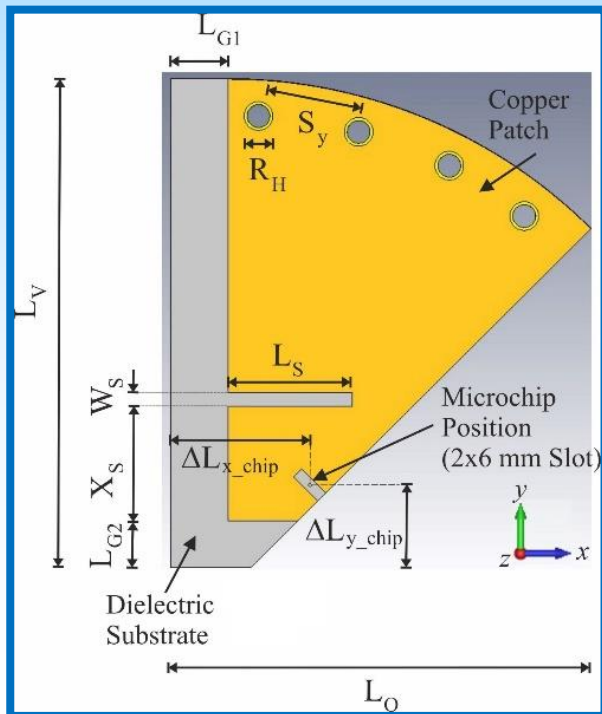

The antenna robustness with respect to the human body proximity is strongly influenced by the ground plane dimension.


Therefore, an appropriate ground plane extension of both ground plane and dielectric substrate should be kept in proximity of each virtual magnetic wall to achieve a better antenna behavior.

In our case, in order to obtain an adequate robustness and isolation for the designed antenna, only the lateral and bottom sides of the ground plane and the substrate have been enlarged, with extensions  $L_{G1}=10\text{ mm}$  and  $L_{G2}=10\text{ mm}$ , respectively.

# Antenna Design

The main points of the design procedure, leading to the shown configuration, are:

## ii) The addition of a slot of length $L_s$

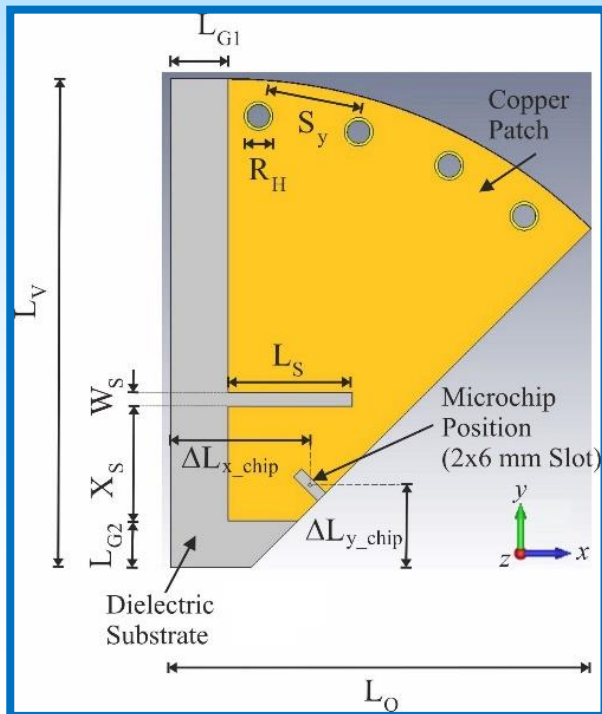


The slot has been cut off in the top patch, and allows to lengthen the path of the current, further reducing the antenna size, since an increase of  $L_s$  reduces the operating frequency.

On the other hand, the slot offset  $X_s$  can be used for fine frequency tuning.

# Antenna Design

The main points of the design procedure, leading to the shown configuration, are:

### iii) The selection of a proper feeding point for the connection of the microchip

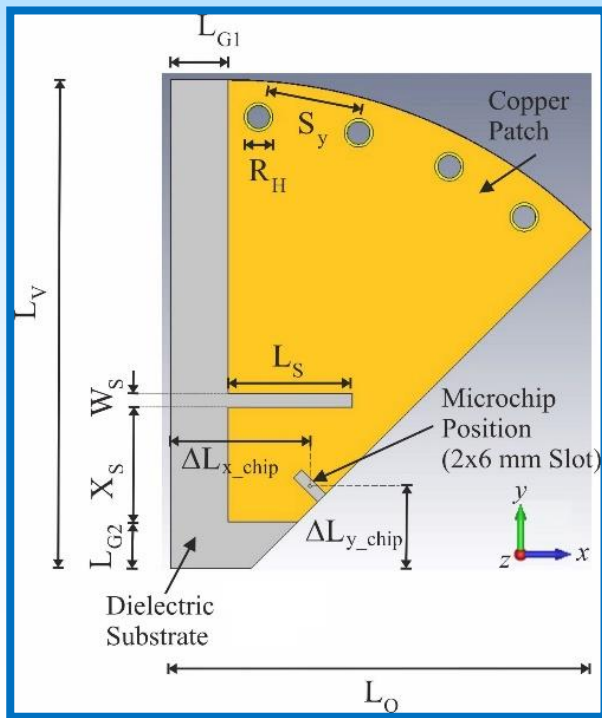


The microchip has been placed along the diagonal side of the SIW cavity.

This is the most appropriate location, since it minimizes the perturbation of the electromagnetic field inside the cavity.

In particular, the position of the microchip has been optimized to easily match the antenna to the input impedance of the Impinj Monza 4 microchip (with a  $Z_{chip}$  equal to  $13-j151 \Omega @ 868 \text{ MHz}$ ).

# Antenna Design


The design has been performed using CST Microwave Studio through an optimization procedure with the antenna attached to the body phantom ( $d = 0$ ).

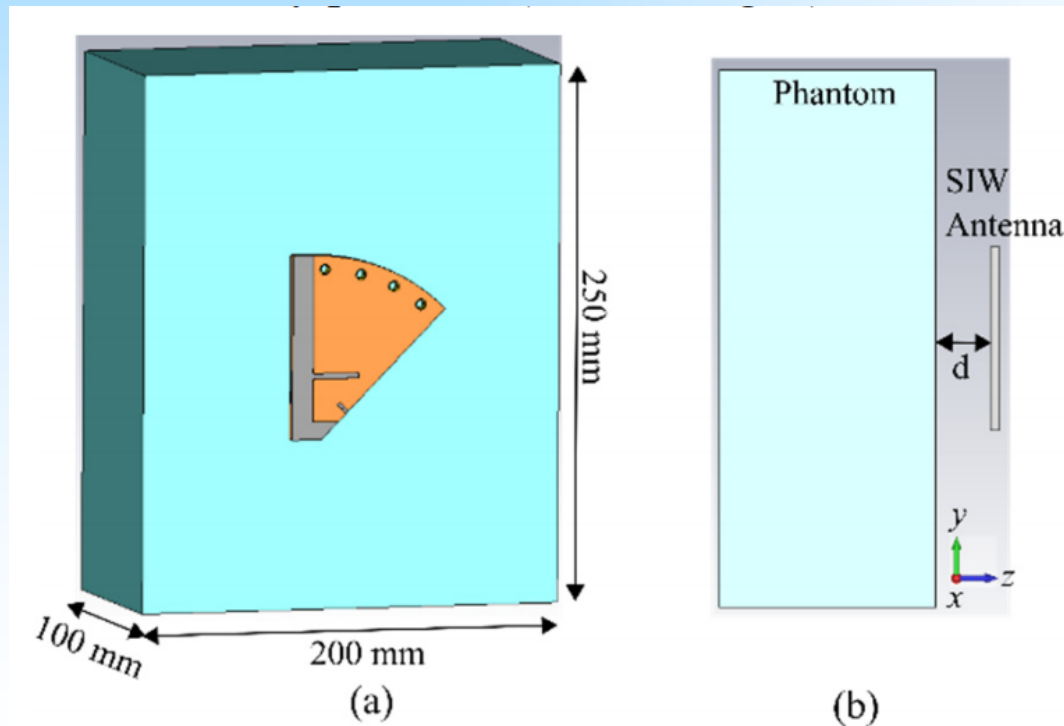

*Designed antenna with the single layer body phantom: a) 3D view; b) side view.*

# Results

To assess the antenna robustness according to the energy-based design consideration, the electric energy density distributions in the antenna substrate for  $d = 0$  (antenna attached to the body) and  $d = 30$  mm are reported at 868 MHz.

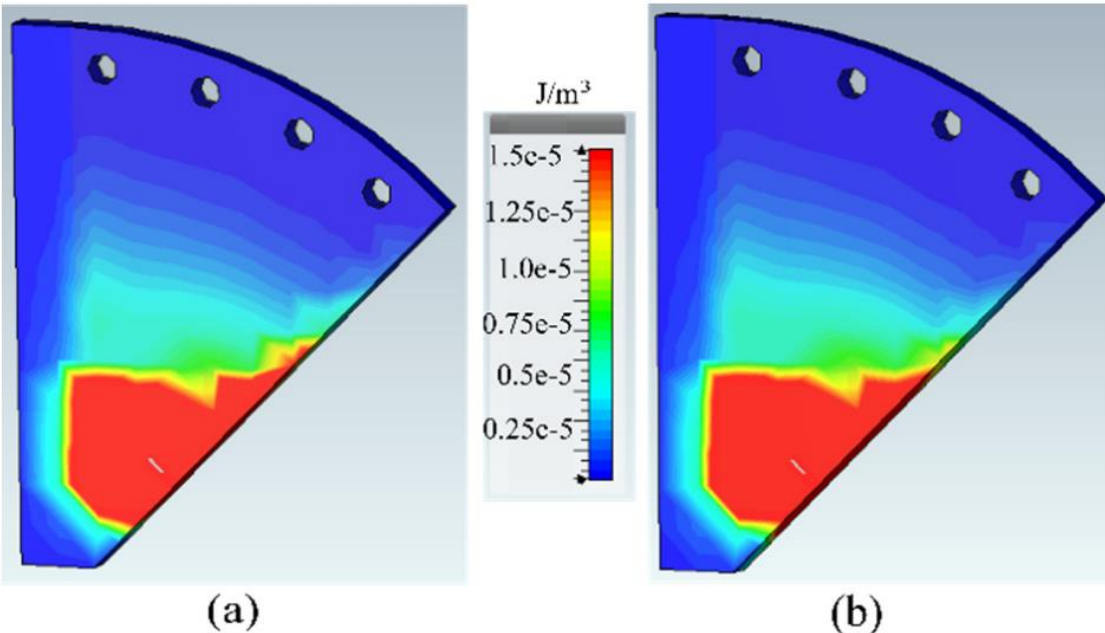


Simulated Electric energy density distribution in the antenna substrate.

(a) Tag attached to the body ( $d = 0$ ); (b) tag at  $d = 30$  mm from the body.

The energy distributions are quite similar, confirming the low sensitivity of the designed antenna with respect to the human body proximity.


# Results

The frequency response of the simulated power transmission coefficient  $\tau$  is shown for different spacings  $d$  between the antenna and the body phantom.

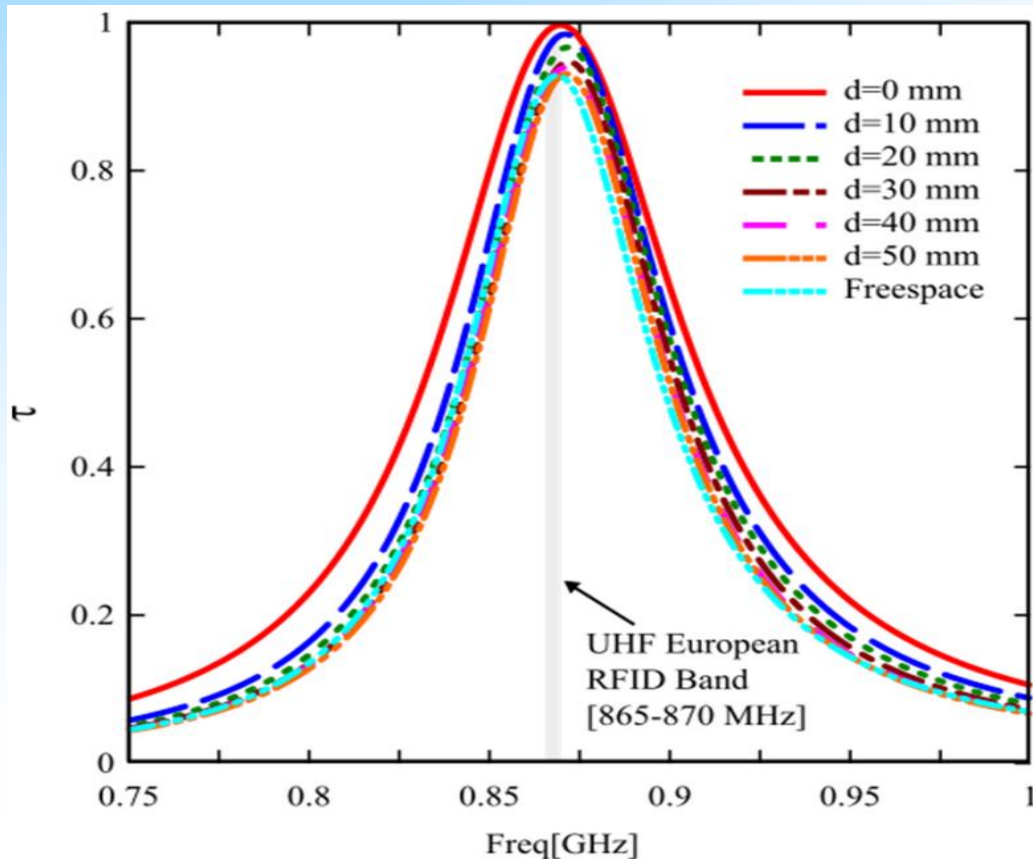

# Results

The transmission coefficient is quite stable with respect to different antenna-body separations, and the antenna bandwidth is quite large:  $\tau > 0.8$  in the range 850-890 MHz for  $d = 0$ , and in the range 859-885 MHz for  $d = 30$  mm.

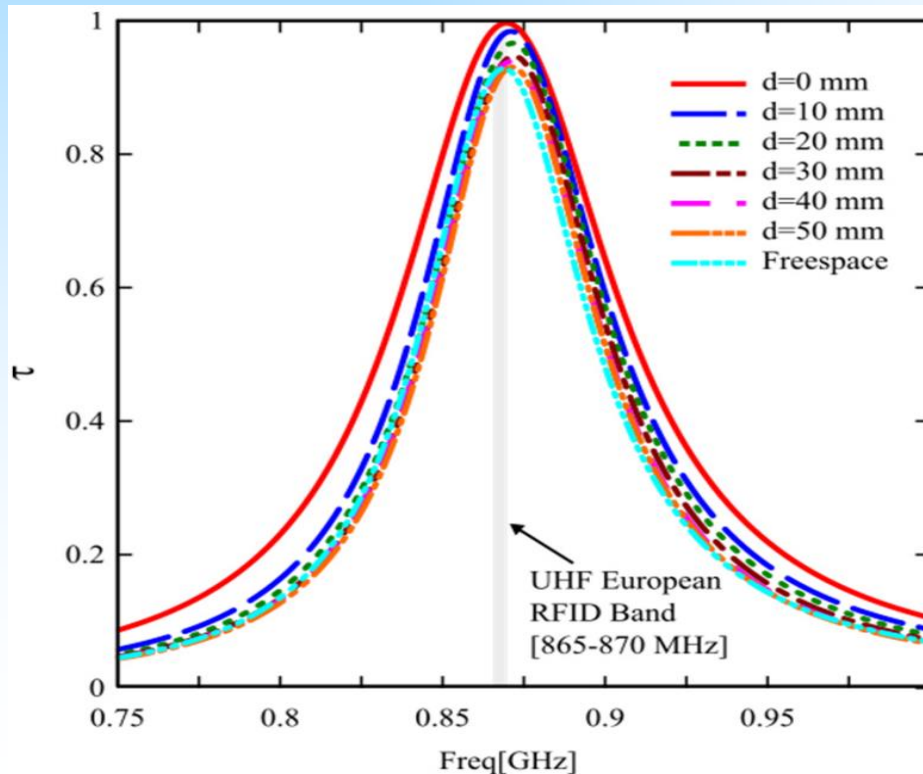





# Conclusion

---

- A wearable textile RFID tag antenna based on a substrate integrated waveguide circular cavity, operating within the European UHF frequency band has been proposed.
- The SIW cavity works at its eight mode (EMSIW), in order to reduce the antenna size, and a further reduction is obtained by optimizing its ground plane size by exploiting suitable energy-based design strategies to mitigate the deterioration in antenna performance due to the body proximity.
- The proposed structure provides high robustness and isolation with respect to human body coupling, which is a feature depending on the proposed SIW architecture, and is confirmed by the reported results.